


LATODESIGN 60 SX



TECHNOLOGY



OPTIONAL

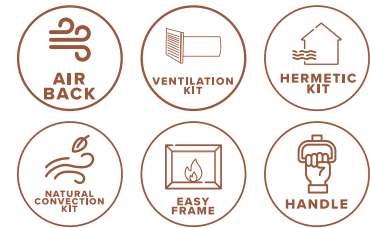

Potenza Globale
Global Power
Puissance globale
Potencia global
Verbrennungsleistung

kW

19,5

Potenza Nominale
Nominal Power
Puissance Nominale
Potencia Nominal
Nennleistung

kW

17

Rendimento totale
Total efficiency
Rendement total
Potencia global
Gesamtausbeute

%

87

Volume riscaldabile
Heating volume
Volume chauffable
Beheizbares Volumen
Volumen calefactable

m³

400

Consumo MAXX
Max consumption
Consumation maximale
Consumo maxi
Maxi verbrauch

Kg/h

4,59

Portata Ventilatore
Fan Range
Débit du ventilateur
Gebläse Förderleistung
Caudal de ventilación

m³/h

700

Uscita fumi
Chimney Output
Sortie conduit de cheminée
Salida conducto de humos
Rauchauslass

mm

202

Ingresso aria
Air inlet
Entrée d'air
Entrada aire
Lufteinlass

mm

80

Uscite aria calda
Warm air outlets
Sorties d'air chaud
Warmluftausgänge
Salidas de aire caliente

N°

4

Peso
Weight
Poids
Peso
Gewicht

Kg

215

Camera di combustione
Burnig chamber
Chambre de combustion
Cámara de combustión
Brennraum

mm

560x410x440

